



## RESIDENTIAL AND COMMERCIAL METAL ROOFING

### PMRS 2" STRUCTURAL AND ARCHITECTURAL MECHANICALLY SEAMED PANEL SYSTEM


Designed particularly as a structural roof system for pre-engineered buildings, PMRS 2" MECH LOCK single-lock panel is the industry's most extensively tested system, with over 50 years of history in the field. The PMRS 2" MECH LOCK incorporates a unique heavy duty interlock clip that secures the system while allowing thermal expansion and contraction.

### SYSTEM APPLICATIONS

- Heavy duty for residential and commercial use
- 1/2"/12" minimum slope
- Can be installed over a solid deck or open framing
- Requires seam sealant if air and water tests are specified
- Engineering available for various panel sizes and substrates upon request

### SUBSTRATES

- 26, 24 and 22 gauge steel
- .032" and .040" aluminum
- 16 oz. and 20 oz. copper
- .7 and .8 mm zinc (RheinZink)

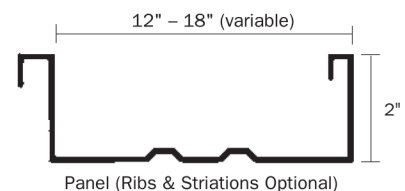

### SYSTEM WARRANTIES

- Galvalume Plus® - 25 year steel warranty on acrylic coated Galvalume®
- Solid - 30-year steel or aluminum warranty on Kynar 500® / Hylar 5000® coating
- Metallic - 20-year steel or aluminum warranty on Kynar 500® / Hylar 5000® coating
- SMP - 15-year steel or aluminum coating warranty